

**Manufacturing Relationships,
Distributing Quality.**



SITA STEEL
ROLLINGS LIMITED



www.sita-steel.com



ABOUT US

SITA STEEL ROLLINGS LTD, established in 1996, has been making bold and decisive strides since its inception in the domain of steel and plastic products supply. Renowned for offering personalized customer service and superior quality products, Sita Steel has carved a niche for itself in a fiercely competitive market with complete product range.

Sita Steel Rollings Ltd. produces and supplies Hollow Sections, Black steel pipes, Open Steel Sections, Mild Steel Plates, Chain Link Fencing, Barbed Wire, U-PVC pipes, HDPE pipes and PPR pipes. Apart from dominating the market segments for aforesaid products, we also stock a wide array of steel and plastic products for catering to construction, fabrication and mining industries. Due to our quality consciousness, customer centric services, and cost efficiency, we have earned an authoritative position in this industry through relentless pursuit of excellence since our commencement. Our dedicated Quality Control Department carries out rigorous checks to ensure adherence to internationally accepted standards.

Sita Steel Rollings Ltd. is self-sufficient in terms of resources, raw materials, financial support and state of the art manufacturing and supplying infrastructure. This empowers us to fulfil orders of all magnitudes within committed deadlines. All products are delivered in exact conformance to the specifications stipulated by our clients. We keep our prices competitive and quality optimal to help clients maintain their edge in the market.

MISSION

Our objective is to build stronger customer relationships, manufacture superlative quality products, and provide our customers and employees a robust and reliable foundation for flourishing in their respective domains.



VISION

We envision becoming a dominant market player in steel and plastic industry by providing optimum value to our customers through superior products that help them achieve their goals decisively in cost competitive manner.



QUALITY POLICY

To have the highest possible quality standard of our products as well as maintain our business in a competitive and profitable way.



CONTENTS

STEEL PRODUCTS

Black Pipes & Galvanised Pipes	6
HOLLOW SECTIONS	7
Furniture Tubes	
Square Pipes	
Rectangular Pipes	
SHEETS & PLATES	10
Mild Steel	
Galvanised Steel	
Aluminum	
Chequered	
Cold Rolled Steel	
OPEN SECTIONS	11
Z-Purlin	
Bottle Section	
Lip Channel	
WIRE PRODUCTS	12
Chain Link Fencing	
Barbed Wire	

PLASTIC PRODUCTS

UPVC	14
UPVC Pipes	
Electrical Conduits	
Fittings	
Borewell Pipes	
HDPE Pipes	17
HDPE Fittings	
PPR pipes	

STEEL PRODUCTS 2

STRUCTURAL STEEL	19
I-Sections / IPE	
U-channels / UPN	
Universal Columns	
Universal Beams	
BARS & LONG PRODUCTS	20
T-Bars	
Alloy Bars	
Hexagonal Bars	
Angles	
Bright Bars / Shafts Carbon Steel	
High Tensile Deformed Bars	
Flat Bars	
Square Bars	
SEAMLESS PIPES	22
WIRE PRODUCTS	23
Weldmesh	
BRC	

MISCELLANEOUS PRODUCTS

Water tanks	25
Welding Rods	
Cutting Disc	
Gypsum board	



STEEL PRODUCTS

BLACK PIPES/ GALVANISED PIPE

EN 10255(As per BS 1387/83)



TYPE	NORMAL BORE		WALL THICKNESS	APPROX OUTSIDE DIAMETER	WEIGHT OF BLACK PIPES PLAIN END		WEIGHT OF GAL PIPE THEREADED & SOCKETED	
CLASS	mm	in	mm	mm	kg/m	m/M.T.	kg/m	m/M.T.
LIGHT "A"	15	½	2.00	21.3	0.95	1053	1.04	962
	20	¾	2.35	26.9	1.41	709	1.53	654
	25	1	2.65	33.7	2.01	498	2.19	457
	32	1¼	2.65	42.4	2.58	388	2.82	355
	40	1½	2.90	48.3	3.25	308	3.55	282
	50	2	2.90	60.3	4.11	243	4.51	222
	65	2½	3.25	76.2	5.80	172	6.39	156
	80	3	3.25	88.9	6.81	147	7.54	133
	100	4	3.65	114.3	9.89	101	11.02	91
MEDIUM "B"	15	½	2.65	21.3	1.22	820	1.33	752
	20	¾	2.65	26.9	1.58	633	1.72	581
	25	1	3.25	33.7	2.44	410	2.66	376
	32	1¼	3.25	42.4	3.14	318	3.42	292
	40	1¼	3.25	48.3	3.61	277	3.94	254
	50	2	3.65	60.3	5.10	196	5.58	179
	65	1½	3.65	76.2	6.51	154	7.16	140
	80	3	4.05	88.9	8.47	118	9.33	107
	100	4	4.50	114.3	12.10	83	13.39	75
	125	5	4.85	139.7	16.20	62	18.04	55
	150	6	4.85	165.1	19.20	52	21.38	47
HEAVY "C"	15	½	3.25	21.3	1.45	690	1.58	633
	20	¾	3.25	26.9	1.90	526	2.06	485
	25	1	4.05	33.7	2.97	337	3.23	310
	32	1¼	4.05	42.4	3.84	260	4.18	239
	40	1½	4.05	48.3	4.43	226	4.83	207
	50	2	4.50	60.3	6.17	162	6.74	148
	65	2½	4.50	76.2	7.90	127	8.66	115
	80	3	4.85	88.9	10.10	99	11.12	90
	100	4	5.40	114.3	14.40	69	15.88	63
	125	5	5.40	139.7	17.80	56	19.76	51
	150	6	5.40	165.1	21.20	47	23.54	42
	200mm and 250mm Black Pipes (Detailed specification on request)							
	200	8	5.20	219.1	27.71	36	30.84	32
	200	8	6.00	219.1	31.82	31	35.18	28
	250	10	6.00	267.0	39.09	26	43.23	23
	250	10	5.00	260.0	29.60	33	-	-




HOLLOW SECTIONS FURNITURE TUBES

EAS 134

SIZE	THICKNESS	WEIGHT	PIECES /M.T	SECTIONAL AREA	MOMENT OF INERTIA	RADIUS OF GYRATION	SECTION MODULUS
mm	mm	kg/mm		cm ²	I(cm ⁴)	I (cm)	z(cm ³)
16	1.0	0.37	451	0.47	0.13	0.53	0.17
	1.2	0.44	379	0.56	0.15	0.52	0.19
	1.5	0.54	309	0.68	0.18	0.52	0.23
19	1.0	0.44	379	0.57	0.23	0.64	0.28
	1.2	0.53	315	0.67	0.27	0.63	0.28
	1.5	0.65	256	0.82	0.32	0.62	0.33
20	1.0	0.50	333	0.60	0.27	0.67	0.27
	1.2	0.59	283	0.71	0.31	0.67	0.31
	1.5	0.75	222	0.87	0.38	0.66	0.38
22	1.0	0.52	322	0.66	0.36	0.74	0.33
	1.2	0.62	269	0.78	0.43	0.74	0.39
	1.5	0.76	220	0.97	0.57	0.73	0.46
25	1.0	0.59	282	0.75	0.54	0.85	0.44
	1.2	0.70	237	0.90	0.64	0.84	0.51
	1.5	0.87	192	1.11	0.77	0.83	0.61
32	1.2	0.91	183	1.16	1.38	1.09	0.86
	1.5	1.13	148	1.44	1.68	1.08	1.05
38	1.2	1.12	149	1.39	2.35	1.30	1.24
	1.5	1.38	121	1.72	2.87	1.29	1.51
42.25	1.2	1.21	137	1.55	3.26	1.45	1.54
	1.5	1.54	108	1.92	3.99	1.44	1.89
48.25	2.0	2.12	79	2.70	6.26	1.52	2.78
	1.2	1.39	120	1.77	4.91	1.66	2.04
	1.5	1.73	96	2.20	6.02	1.65	2.50
60	2.0	2.42	69	3.08	9.25	1.73	3.63
	1.5	2.16	77	2.76	11.80	2.07	3.93
	2.0	2.86	58	3.64	15.34	2.05	5.11
	2.5	3.54	47	4.52	18.70	2.03	6.23
76	2.0	3.75	44	4.65	31.85	2.62	8.38
	2.5	4.53	37	5.77	39.02	2.60	10.27
89	2.0	4.29	39	5.47	51.74	3.08	11.63
	2.5	5.37	31	6.79	63.59	3.06	14.29

HOLLOW SECTIONS SQUARE PIPES

EAS 134

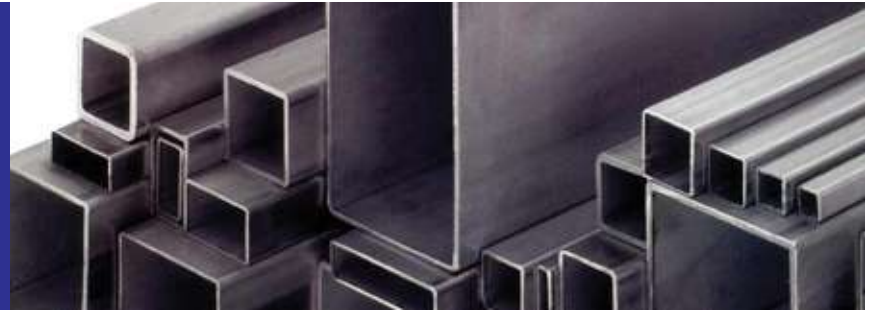

SIZE	THICK- NESS	WEIGHT	PIECES /M.T	SECT. AREA	MOMENT OF INERTIA		RADIUS OF GYRATION		SECTION MODULUS	
mm	mm	kg/m		(cm ²)	I _y (cm ⁴)	I _x (cm ⁴)	i _x (cm)	i _y (cm)	Z _x (cm ³)	Z _y (cm ³)
12X12	1.0	0.37	450	0.44	0.08	0.08	0.45	0.45	0.12	0.12
	1.2	0.41	407	0.52	0.10	0.10	0.44	0.44	0.17	0.17
	1.5	0.49	340	0.63	0.11	0.11	0.43	0.43	0.18	0.18
16X16	1.0	0.46	362	0.60	0.22	0.22	0.61	0.61	0.27	0.27
	1.2	0.56	298	0.71	0.26	0.26	0.60	0.60	0.32	0.32
	1.5	0.68	245	0.87	0.30	0.30	0.59	0.59	0.38	0.38
20X20	1.0	0.61	273	0.76	0.46	0.46	0.78	0.78	0.46	0.46
	1.2	0.71	235	0.90	0.53	0.53	0.77	0.77	0.53	0.53
	1.5	0.87	192	1.11	0.64	0.64	0.76	0.76	0.64	0.64
	2.0	1.13	147	1.44	0.79	0.79	0.74	0.74	0.79	0.79
25X25	1.0	0.80	208	0.96	0.92	0.92	0.98	0.98	0.74	0.74
	1.2	0.90	185	1.14	1.08	1.08	1.97	1.97	0.86	0.86
	1.5	1.11	150	1.41	1.30	1.30	0.96	0.96	1.04	1.04
	2.0	1.44	116	1.84	1.63	1.63	0.94	0.94	1.30	1.30
	3.0	2.07	81	2.64	2.17	2.17	0.90	0.90	1.74	1.74
30X30	1.0	0.93	179	1.16	1.63	1.63	1.18	1.18	1.08	1.08
	1.2	1.08	154	1.38	1.91	1.91	1.17	1.17	1.27	1.27
	1.5	1.34	124	1.71	2.32	2.32	1.16	1.16	1.55	1.55
	2.0	1.75	95	2.24	2.94	2.94	1.14	1.14	1.96	1.96
	3.0	2.54	66	3.24	3.99	3.99	1.10	1.10	2.66	2.66
40X40	1.0	1.19	140	1.51	3.95	3.95	1.61	1.61	1.97	1.97
	1.2	1.46	114	1.86	4.67	4.67	1.58	1.58	2.34	2.34
	1.5	1.81	92	2.31	5.71	5.71	1.57	1.57	2.86	2.86
	2.0	2.39	70	3.04	7.34	7.34	1.55	1.55	3.67	3.67
	3.0	3.48	48	4.44	10.20	10.20	1.51	1.51	5.10	5.10
50X50	1.5	2.28	73	2.91	11.42	11.42	1.98	1.98	4.57	4.57
	2.0	3.01	55	3.84	14.77	14.77	1.96	1.96	5.91	5.91
	3.0	4.43	38	5.64	20.85	20.85	1.92	1.92	8.34	8.34
	4.0	5.78	29	7.36	26.15	26.15	10.46	10.46	1.88	1.88
60X60	3.0	4.43	38	5.64	20.85	20.85	1.92	1.92	8.34	8.34
	3.0	5.37	31	6.84	37.14	37.14	2.33	2.33	12.38	12.38
	4.0	7.03	24	8.96	47.07	47.07	2.29	2.29	15.69	15.69
75X75	2.0	4.58	36	5.84	51.91	51.91	2.98	2.98	13.84	13.84
	3.0	6.78	25	8.64	74.78	74.78	2.94	2.94	19.94	19.94
	4.0	8.92	19	11.36	95.75	95.75	2.90	2.90	25.53	25.53
	6.0	13.00	13	16.56	132.40	132.40	2.83	2.83	35.31	35.31
100X100	2.0	6.15	27	7.84	125.54	125.54	4.00	4.00	25.11	25.11
	3.0	9.14	18	11.64	182.71	182.71	3.96	3.96	36.54	36.54
	4.0	12.18	14	15.36	236.34	236.34	3.92	3.92	47.27	47.27
	6.0	17.71	9	22.56	333.59	333.59	3.85	3.85	66.72	66.72
125X125	3.0	11.49	15	14.60	363.00	363.00	4.98	4.98	58.14	58.14
	4.0	15.20	11	19.36	473.00	473.00	4.94	4.94	75.67	75.67
	6.0	22.42	7	28.56	676.00	676.00	4.86	4.86	108.12	108.12
150X150	3.0	13.85	12	17.64	636.00	636.00	6.00	6.00	84.74	84.74
	4.0	18.34	9	23.36	831.00	831.00	5.96	5.96	110.74	110.74
	6.0	27.13	6	34.56	1196.00	1196.00	5.88	5.88	159.53	159.53
200X200	4.0	24.62	7	31.36	2009.00	2009.00	8.00	8.00	200.87	200.87
	6.0	36.55	5	46.56	2923.35	2923.35	7.92	7.92	292.33	292.33




HOLLOW SECTIONS RECTANGULAR PIPES

EAS 134

SIZE	THICK- NESS	WEIGHT	PIECES /M.T	SECT. AREA	MOMENT OF INERTIA		RADIUS OF GYRATION		SECTION MODULUS	
mm	mm	kg/m		(cm ²)	I _y (cm ⁴)	I _x (cm ⁴)	i _x (cm)	i _y (cm)	Z _x (cm ³)	Z _y (cm ³)
40x20	1.2	1.08	154	1.38	2.87	0.96	1.44	0.83	1.44	0.96
	1.5	1.40	119	1.71	3.49	1.15	1.43	0.83	1.75	1.15
	2.0	2.76	95	2.24	4.44	1.44	1.14	0.80	1.22	1.43
40x25	1.0	1.01	165	1.29	1.35	2.81	1.02	1.47	1.08	1.4
	1.2	1.18	141	1.50	3.32	1.59	1.49	1.03	1.66	1.27
	1.5	1.46	114	1.86	4.04	1.73	1.47	1.01	2.02	1.54
	2.0	1.91	87	2.44	5.17	2.43	1.45	0.99	2.59	1.94
50x25	3.0	2.78	60	3.54	7.11	3.26	1.42	0.96	3.59	2.61
	1.0	1.01	165	1.29	1.35	2.81	1.02	1.47	1.08	1.4
	1.5	1.69	99	2.15	7.00	2.43	1.80	1.04	2.80	1.87
	2.0	2.23	75	2.84	9.00	2.96	1.78	1.02	3.60	2.37
60x40	3.0	3.25	51	4.14	12.55	3.99	1.74	0.96	5.02	3.19
	1.2	1.84	91	2.34	12.12	6.48	2.27	1.66	4.04	3.24
	1.5	2.28	73	2.90	14.89	7.93	2.26	1.65	4.96	3.96
	2.0	3.01	55	3.83	19.31	10.22	2.24	1.63	6.43	5.11
75x50	3.0	4.43	38	5.64	27.38	14.31	2.21	1.59	9.12	7.10
	2.0	3.73	45	4.84	38.50	20.50	2.82	2.06	10.20	8.21
	3.0	5.60	30	7.14	55.30	29.10	2.78	2.02	14.70	11.60
100x50	4.0	7.34	23	9.36	70.50	36.70	2.74	1.98	18.80	14.70
	3.0	6.78	25	8.64	112.00	37.40	3.60	2.08	22.40	14.90
	4.0	8.92	19	11.30	144.00	47.30	3.56	2.04	28.80	18.90
150x50	3.0	9.14	18	11.60	311.00	54.00	5.18	2.15	41.50	21.60
	4.0	12.06	14	15.30	404.00	68.50	5.14	2.11	53.80	27.40
	6.0	17.71	9	22.56	574.03	93.15	5.04	2.03	76.54	37.26
150x100	3.0	11.49	15	14.64	473.00	253.00	5.69	4.16	63.1	5.76
	4.0	15.20	11	19.36	670.00	329.00	5.65	4.12	82.3	5.79
	6.0	22.42	7	28.56	885.00	466.00	5.57	4.04	118.0	3.31
200x100	3.0	13.85	12	17.64	947.00	324.00	7.33	4.28	94.72	64.78
	4.0	18.34	9	23.36	1240.00	421.00	7.29	4.24	124.03	84.15
	6.0	27.13	6	34.56	1794.00	599.00	7.20	4.16	179.39	119.81

SHEETS AND PLATES MILD STEEL

WIDTH	LENGTH	THICKNESS
1219 mm	2438 mm or customised	1.20 mm – 100.0 mm

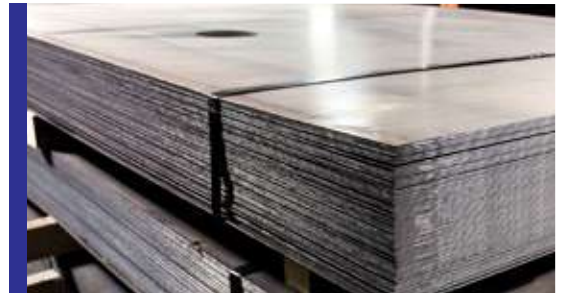

SHEETS AND PLATES GALVANISED STEEL

JIS G 3302 SGCC Zinc Grade: 120 GSM/Sq.mtr

Regular Spangle, Chromated, Unoiled and dry

WIDTH	LENGTH	THICKNESS
1219 mm	2438 mm or customised	0.6 mm – 1.0 mm



SHEETS AND PLATES ALUMINIUM

Plain : Alloy 1100, Temper: H14, Temper Mill Fin

Chequered : Alloy 3105, Temper: F, Temper Mill Finish

WIDTH	LENGTH	THICKNESS
1219 mm	2438 mm or customised	0.45 mm – 4.0 mm



SHEETS AND PLATES CHEQUERED

EN 10025 S235 JR, Teardrop Pattern

WIDTH	LENGTH	THICKNESS
1219 mm	2438 mm or customised	2.0 mm – 6.0 mm




SHEETS AND PLATES

COLD ROLLED STEEL

JIS 3141, Colod Rolled Closed Annealed coil




WIDTH	LENGTH	THICKNESS
1219 mm	2438 mm or customised	0.45 mm – 4.0 mm

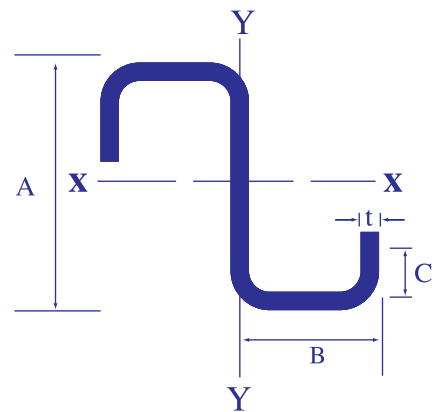

OPEN SECTIONS

Z-PURLIN

SIZE AXB	THICK- NESS (t)	WEIGHT	SECT. AREA	DIMENSIONS			MOMENT OF INERTIA		SECTION MODULUS		RADIUS OF GYRATION	
				A	B	C	I _x	I _y	Z _x	Z _y	I _x	I _y
mm	mm	kg/m		mm	mm	mm	(cm ⁴)	ly(cm ⁴)	Z _x (cm ³)	Z _y (cm ³)	Z _x (cm ³)	Z _y (cm ³)
101.6x50.8	2.0	3.64	4.63	101.6	50.8	22.20	70.18	33.87	13.81	6.80	3.83	2.70
127.0x50.8	2.0	4.05	5.16	127.0	127.0	22.20	152.99	33.87	19.84	6.80	4.94	2.56
152.4x50.8	2.0	4.44	5.66	152.4	152.4	22.20	194.14	33.87	25.47	6.80	5.85	2.44

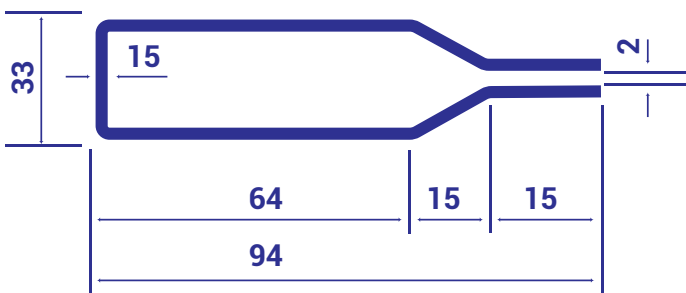

OPEN SECTIONS

BOTTLE SECTION

15.6 Kg/6m Long


HUI.C3

SIZE (MM)	THICKNESS (MM)	WEIGHT KG/PC
94 x 33	1.20	12.50
105 x 33	1.20	13.60


OPEN SECTIONS LIP CHANNEL

15.6 Kg/6m Long

HUI.C3

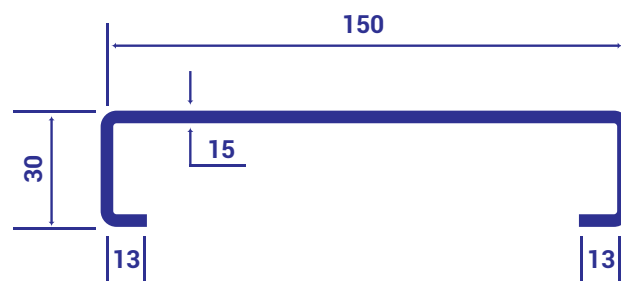

SIZE (mm)	THICKNESS (mm)	WEIGHT Kg/pc
75 x 50	2.00	17.80

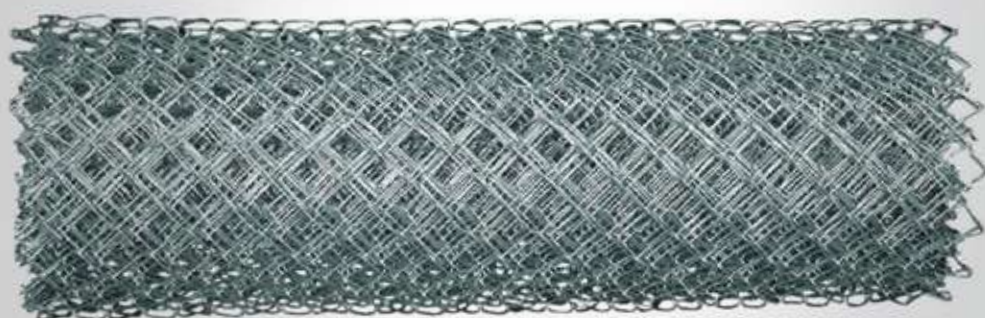

WIRE PRODUCTS CHAIN LINK FENCING

Standard: Galvanised Wire

Coating: Zinc or PVC

SIZE	THICKNESS
6' x 15meters or customised	2.0mm – 2.5mm



WIRE PRODUCTS BARBED WIRE

SIZE

8' x 93' x 4.5mm - Roll form



PLASTIC PRODUCTS

UPVC PIPES



Nominal OD mm DN	S 16.7 SDR 34.4 PN 6 CLASS B		S 10 SDR 21 PN 10 CLASS C		S 8 SDR 17 PN 12.5 CLASS D		S 6.3 SDR 13.6 PN 16 CLASS E	
	W / T (mm)		W / T (mm)		W / T (mm)		W / T (mm)	
	Min	Max	Min	Max	Min	Max	Min	Max
20							1.50	1.90
25					1.50	1.90	1.90	2.30
32			1.60	2.00	1.90	2.30	2.40	2.90
40	1.50	1.90	1.90	2.30	2.40	2.90	3.00	3.60
50	1.60	2.00	2.40	2.90	3.00	3.50	3.70	4.30
63	2.00	2.40	3.00	3.50	3.80	4.40	4.70	5.40
75	2.30	2.80	3.60	4.20	4.50	5.20	5.60	6.40
90	2.80	3.30	4.30	5.00	5.40	6.20	6.70	7.60

Nominal OD mm DN	S 20 SDR 41 PN 6 CLASS B		S 12.5 SDR 26 PN 10 CLASS C		S 10 SDR 21 PN 12.5 CLASS D		S 8 SDR 17 PN 16 CLASS E	
	W / T (mm)		W / T (mm)		W / T (mm)		W / T (mm)	
	Min	Max	Min	Max	Min	Max	Min	Max
110	2.70	3.20	4.20	4.90	5.30	6.10	6.60	7.50
125	3.10	3.70	4.80	5.50	6.00	6.90	7.40	8.40
140	3.50	4.10	5.40	6.20	6.70	7.60	8.30	9.40
160	4.00	4.60	6.20	7.10	7.70	8.70	9.50	10.70
180	4.40	5.10	6.90	7.80	8.60	9.70	10.70	12.00
200	4.90	5.60	7.70	8.70	9.60	10.80	11.90	13.30
225	5.50	6.30	8.60	9.70	10.80	12.10	13.40	15.00
250	6.20	7.10	9.60	10.80	11.90	14.30	14.80	16.50
280	6.90	7.80	10.70	12.00	13.40	15.00	16.60	18.50
315	7.70	8.70	12.10	13.60	15.00	16.70	18.70	20.80

UPVC

ELECTRICAL CONDUITS



Nominal OD mm DN	ECONOMY		STANDARD	
	W / T (mm)		W / T (mm)	
	Min	Max	Min	Max
16	0.80	0.90	1.50	1.60
20	0.80	0.90	1.55	1.65
25	1.10	1.20	1.80	1.90
32	1.30	1.40	2.10	2.20

UPVC

FITTINGS



Nominal OD mm	SOCKET	PN
40 mm Elbow	f/f	6
40 mm Tee	f/f/f	6
50 mm Elbow	f/f	6
50 mm Tee	f/f/f	6
63 mm Elbow	f/f	6
63 mm Tee	f/f/f	6
75 mm Elbow	f/f	6
75 mm Tee	f/f/f	6
90 mm Elbow	f/f	6
90 mm Tee	f/f/f	6
110 mm Elbow	m/f	6
110 mm Elbow	f/f	6
110 mm Elbow (with Vent)	f/f	6
110 mm Tee	m/f/f	6
110 mm 'Y'	f/f/f	6
160 mm Elbow	f/f	6
160 mm Tee	f/f/f	6



UPVC

BOREWELL PIPES

PIPE TYPE	PIPE SIZE - mm			THREAD TYPE	ROW OF SLOTS	TOTAL SLOTS	SLOT WIDTH	THREAD LENGTH
	OD	W.T.	BORE/ID					
	Min	Max	Min				mm	mm
Casing	90mm	5.6	78.8	Trapezoidal				60
Screen		5.6	78.8	Trapezoidal	3	7092	0.8	60
Casing	110mm	6.0	98.0	Trapezoidal				62
Screen		6.0	98.0	Trapezoidal	4	1456	0.8	62
Casing	125mm	6.2	112.6	Trapezoidal				64
Screen		6.2	112.6	Trapezoidal	4	1456	0.8	64
Casing	140mm	6.9	126.2	Trapezoidal				67
Screen		6.9	126.2	Trapezoidal	4	1456	0.8	67
Casing	165mm	7.7	149.5	Trapezoidal				72
Screen		7.7	149.5	Trapezoidal	5	1820	0.8	72
Casing	200mm	9.5	181.0	Trapezoidal				115
Screen		9.5	181.0	Trapezoidal	5	1820	1.5	115
Casing	225mm	10.8	203.0	Trapezoidal				115
Screen		10.8	203.0	Trapezoidal	6	2184	1.5	115
Casing	250mm	12.0	226.0	Trapezoidal				115
Screen		12.0	226.0	Trapezoidal	8	2912	1.5	115
Casing	280mm	13.4	253.2	Trapezoidal				115
Screen		13.4	253.2	Trapezoidal	8	2912	1.5	115
Casing	315mm	15.0	285.0	Trapezoidal				120
Screen		15.0	285.0	Trapezoidal	8	2912	1.5	120

HDPE PIPES



Nomina OD mm	Nomina Bore Inch	S 20 SDR 41 PN 4 Class A		S 12.5 SDR 26 PN 6.3 Class B		S 8 SDR 17 PN 10 Class C		S 6.3 SDR 13.6 PN 12.5 Class D		S 5 SDR 11 PN 16 Class E		Length
		W/T (mm)		W/T (mm)		W/T (mm)		W/T (mm)		W/T (mm)		
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
20	1/2"	*0.9	*1.1	*1.2	*1.5	*1.5	*1.8			1.9	2.3	150
25	3/4"	*0.9	*1.1	*1.2	*1.5	*1.5	*1.8	2.0	2.3	2.3	2.7	150
32	1"	*0.9	*1.1	*1.2	*1.8	2.0	2.3	2.4	2.8	2.9	3.4	150
40	1 1/4"	*0.9	*1.2	*1.3	*1.8	2.4	2.8	3.0	3.5	3.7	4.2	150
50	1 1/2"	*1.7	*1.9	2.0	2.3	3.0	3.4	3.7	4.2	4.6	5.2	150
63	2"			2.5	2.9	3.8	4.3	4.7	5.3	5.8	6.5	150
75	2 1/2"			2.9	3.3	4.5	5.1	5.6	6.3	6.8	7.6	150
90	3"			3.5	4.0	5.4	6.1	6.7	7.2	8.2	9.2	100
110	4"			4.2	4.8	6.6	7.4	8.1	9.1	10.0	11.1	50

HDPE FITTINGS



PPR PIPES

Nominal OD mm	PN	SDR	WALL THICKNESS
			mm
20	20	6	3.40
25	20	6	4.20
32	20	6	5.40
40	20	6	6.70
50	20	6	8.30
63	20	6	10.50


A close-up photograph of a large stack of steel pipes. The pipes are arranged in a grid-like pattern, with their circular ends facing the camera. The lighting is bright, creating a strong contrast between the dark interior of the pipes and the lighter exterior. A dark blue horizontal band is overlaid on the middle of the image, containing the text "STEEL PRODUCTS 2" in white, bold, sans-serif capital letters.

STEEL PRODUCTS 2

STRUCTURAL STEEL I-SECTIONS / IPE

Grade : Gr 43A

GRADE	SIZE	LENGTH
Gr 43A	100 x 50mm x 8.1kg/m - 220 x 110mm x 26.2kg/m	24 mm– 135 mm

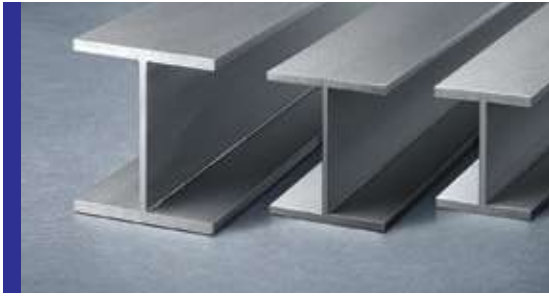

STRUCTURAL STEEL U-CHANNELS / UPN

EN 10025 S235 JR


GRADE	SIZE	LENGTH
S 235	75 x 40 x 4.5mm - 200 x 75 x 5mm	6 meters or 12 meters



STRUCTURAL STEEL UNIVERSAL COLUMNS

EN 10025 355 JR

GRADE	SIZE	LENGTH
S 355	152 x 152 x 23kg/m - 305 x 305 x 96kg/m	6 meters or 12 meters

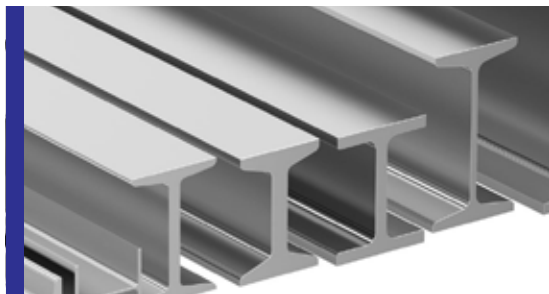

STRUCTURAL STEEL UNIVERSAL BEAMS

EN 10025 355 JR

GRADE	SIZE	LENGTH
S 355	203 x 133 x 25 kg/m - 533 x 210 x 82 kg/m	6 meters or 12 m



BARS & LONG PRODUCTS
T-BARS



GRADE	SIZE	THICKNESS
S235 JR	20 x 20mm – 25 x 25mm	3.0mm

BARS & LONG PRODUCTS
ALLOY BARS

GRADE	LENGTH	THICKNESS
AISI 4140	5.8 meters	24 mm – 135 mm



BARS & LONG PRODUCTS
HEXAGONAL BARS



GRADE	LENGTH	THICKNESS
AISI 1018	5.8 meters	24 mm – 135 mm

BARS & LONG PRODUCTS
ANGLES

SIZE	LENGTH	THICKNESS
20 x 20mm – 150 x 150mm	6 meters	3.0 mm – 10.0 mm



BARS & LONG PRODUCTS
**BRIGHT BARS
/ SHAFTS**

AISI 1018 / 1020 or 3B Tolerance : H11

GRADE	LENGTH	DIAMETER
EN 3B	5.8 meters	12mm – 155mm



BARS & LONG PRODUCTS
**HIGH TENSILE
DEFORMED BARS**

BS 4449, Grade 460B

GRADE	LENGTH	THICKNESS
BS4449 – 460 MPA	12 meters	8 mm – 32 mm



BARS & LONG PRODUCTS
FLAT BARS

SIZE	THICKNESS
20mm – 100mm	3.0mm – 8.0mm

BARS & LONG PRODUCTS

SQUARE BARS


MATERIAL	SIZE	LENGTH
Hot Rolled Mild Steel	10mm – 12mm	6.0 meters



SEAMLESS PIPES

Specification: Schedule 40 Carbon Steel

GRADE	SIZE	LENGTH
ASTM A106	1/8" – 12"	5.8 meters

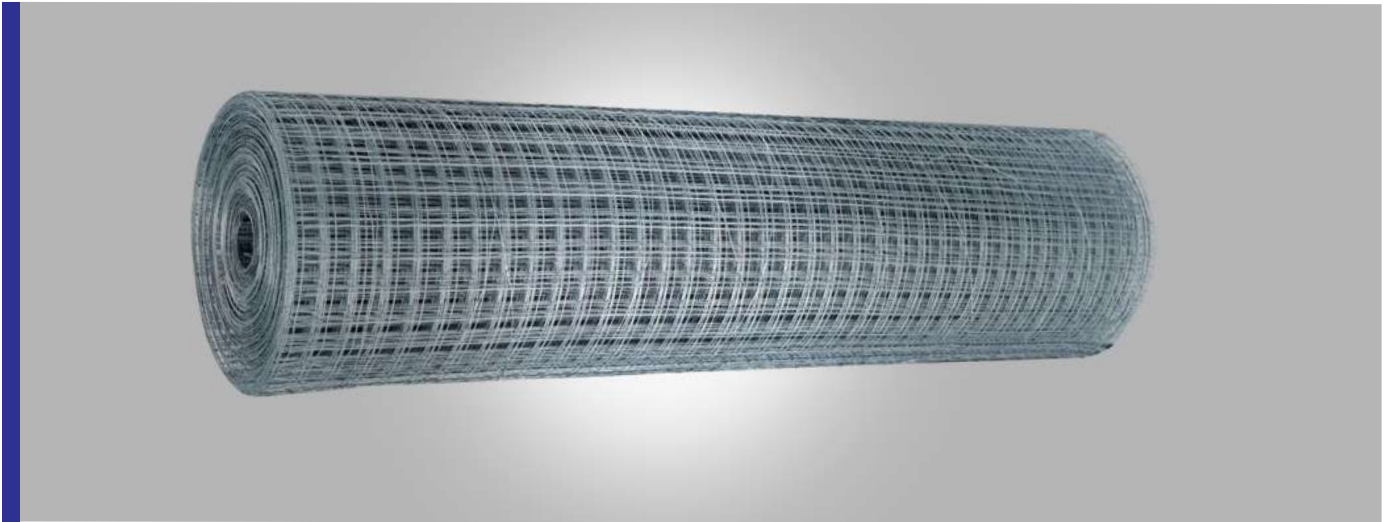

WIRE PRODUCTS
WELD MESH

SIZE

8' x 4' x 3 x 2.5 mm



WIRE PRODUCTS
BRC

SIZE

8' x 93 x 4.5mm

8' x 50' x 6.0mm (A142)




MISCELLANEOUS PRODUCTS



WATER TANKS


TYPE	SIZE
PLASTIC TANKS	210 litres – 10,000 litres

WELDING RODS

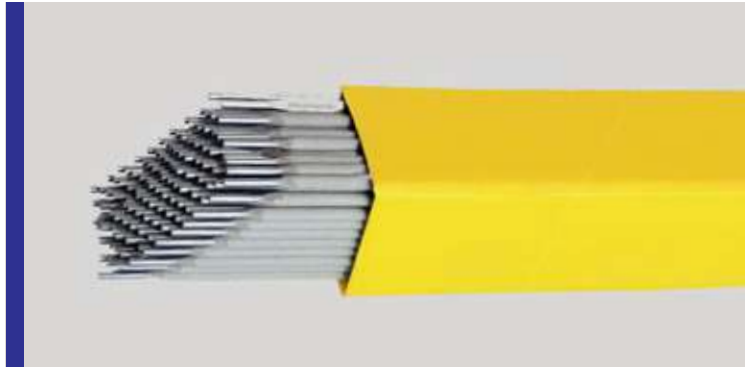

CUTTING DISC

GYPSUM BOARD

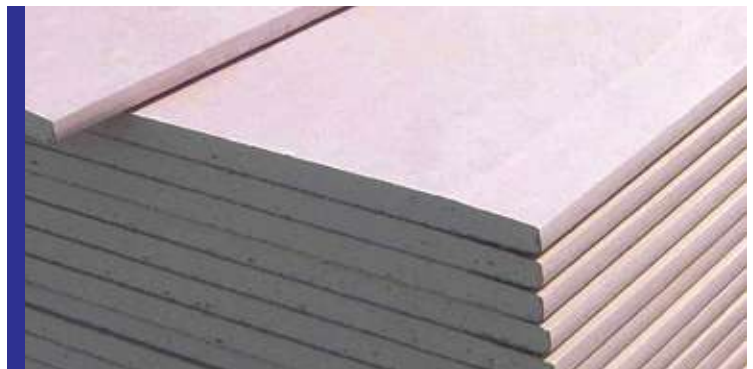

CERTIFICATION



**QUALITY BUILDS
CUSTOMER CONFIDENCE**


LOCATION



Sita Steel Rollings Ltd, P.O. Box 21443, Dar Es Salaam, Tanzania

+ 255 222 807 761/4 +255 773 773 362 info@sita-steel.com www.sita-steel.com



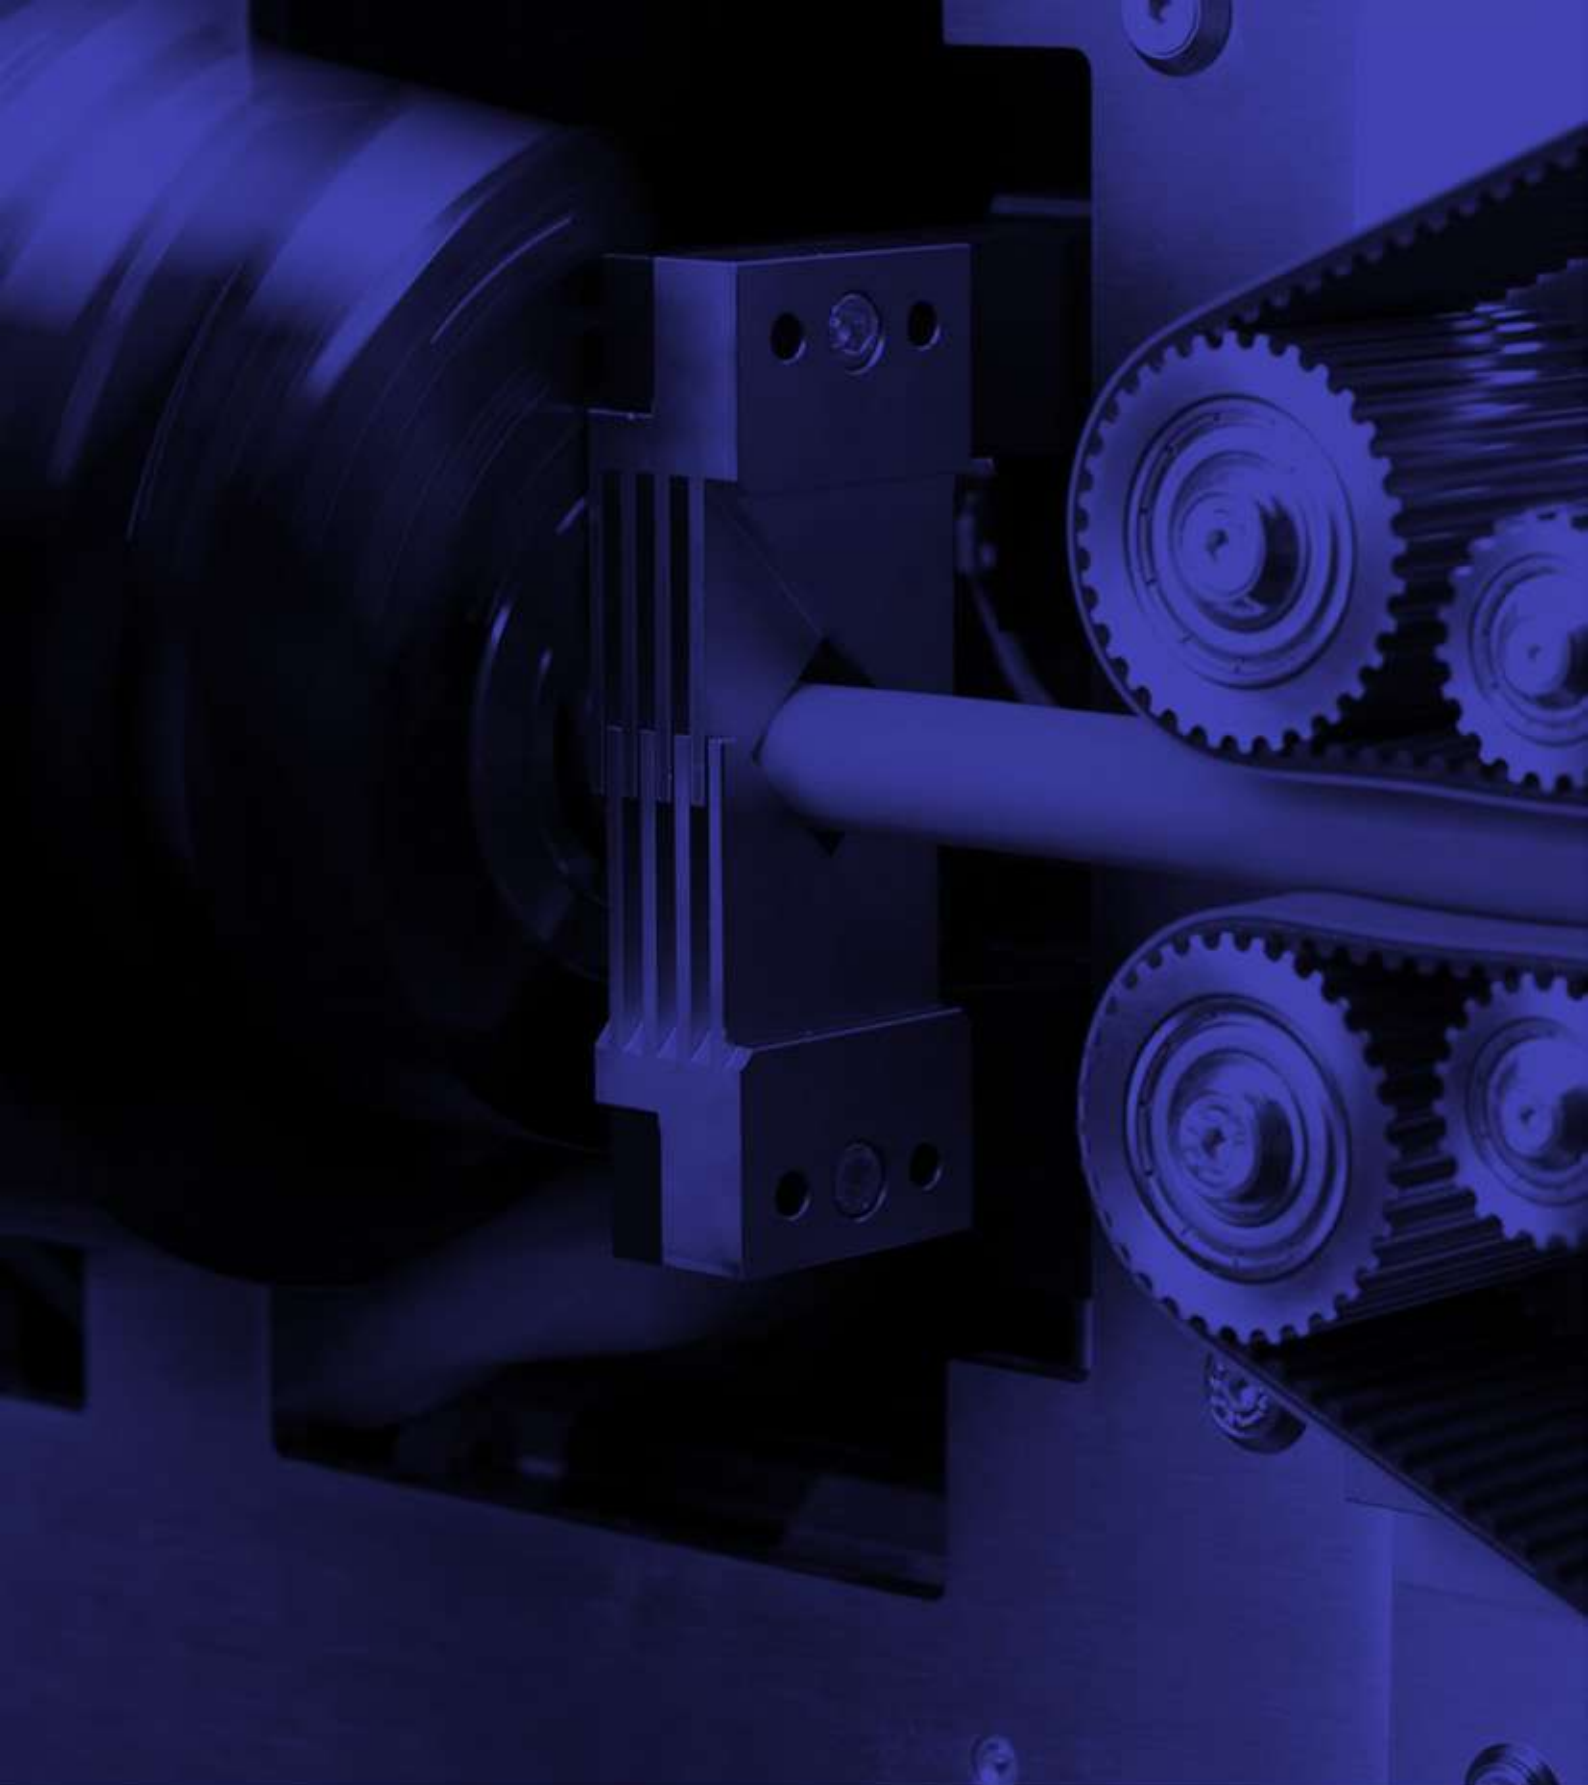

SITA STEEL ROLLINGS LTD

P.O. BOX 21443,
Dar Es Salaam, TANZANIA

+ 255 222 807 761/4

+255 773 773 362

info@sita-steel.com

www.sita-steel.com